


SCS ETC

 Bluetooth™

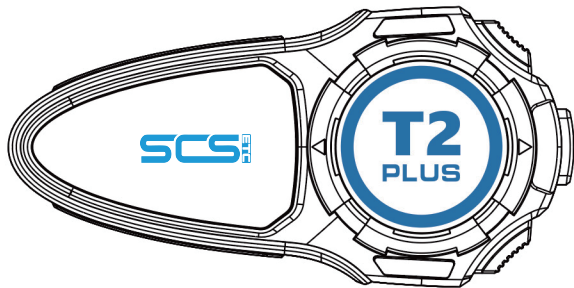

T2
PLUS
INSTRUCTION MANUAL
HELMET
BLUETOOTH INTERCOM

Welcome to SCS

Thank you for choosing SCS Bluetooth communication system, by purchasing our products, you will get the most intimate protection and the most worry-free after-sales service. All the products we bring to you are manufactured to the highest standards of performance and safety. Adhering to the brand concept of "make cycling more free" we take provide safer, smarter and more convenient outdoor communication products for every cyclist" as our mission.

1.Product Functions introduction

- Bluetooth 5.2
- One-key Pairing
- Double Coil Subwoofer
- Ambient Sound Reception
- Music sharing
- 10-WayIntercom
- Audio Multitasking
- Updated 3 EQ Sound
- FM Radio
- Voice Command
- Mesh 3.0
- Magnetic Mounting
- Long Battery Life
- IP67 Waterproof

2. List of Packing Parts



①



②



③



④



⑤



⑥ ⑦



⑧



⑨



⑩



⑪



⑫

- ① T2Plus
- ② Speaker & boom microphone
- ③ Wired microphone
- ④ Metal clip
- ⑤ Charging cable
- ⑥ 3M double-sided pad
- ⑦ 3M single-sided pad
- ⑧ Microphone velcro
- ⑨ Magnetic base
- ⑩ Speaker velcro
- ⑪ Pads for thickening speakers
- ⑫ Manual

3. Two Ways of Installation

a) Use Double-sided Tape



- 1 Peel off the sticker of double-sided pad and stick it on the mounting bracket.




- 2 Attach the mounting bracket with double-sided pad to the helmet.



- 3 Attach the mounting bracket with double-sided pad to the helmet.

Remove the mainframe:

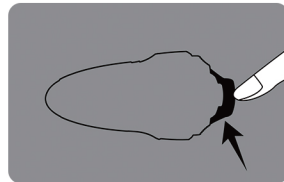

- Press the plastic tab of the magnetic base and remove the main unit upwards at the same time

b) Use Metal Clip



- 1 Peel off the sticker of single-sided pad and stick it on the mounting bracket.



- 2 Snap the metal clip into the mounting bracket.



- 3 Snap the mounting bracket with the metal clip in place into the bottom of the helmet.













- 4 Push the device toward the bottom of the helmet and snap it into the mounting bracket, the installation is complete.

4. Function Keys introduction







5).Bluetooth Basic Functions Operation

Function	Button	Operation	Voice prompts	Indicator Light
Power on		Long press the [Power Button] for 3 seconds	Welcome to SCS Bluetooth communication system	Blue light flashes for 1 second
Power off		Long press the [Power Button] for 3 seconds	Power off	Red light flashes for 1 second
Battery level broadcast	 + 	Short press [previous button + multi-function buttons]	Broadcasting based on remaining power	/
Clear pairing record	 + 	Long press [previous button + power button] for 3 seconds	/	Red and blue lights on at the same time
Language switching	 +  + 	Long press [Power Button + multifunction button + next button] for 5 seconds	Welcome to Bluetooth communication system	Blue light flashes for 2 second
Activate voice assistant		In standby mode, short press [next button] 2 times	/	Blue light flashes slowly

Phone Calls Function






(Note: Make sure the T2Plus is powered on and within 1 meter of the Bluetooth device you are about to pair with.)

Function	Button	Operation	Prompts	Bluetooth indicator light
Pairing with mobile phones		Long press the [multi-function button] for about 4 seconds	10 Pairing Status 11 Device Connected 28 Device Disconnected	Red and blue lights flash rapidly alternately
Answering phone calls		When ringing, briefly press the [multi-function button] 1 time	/	Blue light flashes fast
Ending phone calls		During a call, press the [multifunction button] briefly 1 time	/	Blue light breathing continuous flash
Reject phone calls		When ringing, press and hold the [multifunction button] for 2 seconds.	/	Blue light blinks rapidly
Last Number Callback		Short press twice [multifunction button]	/	Blue light blinks rapidly
Turn up the call volume		During a call, rotate the function key clockwise	Duh~	/
Turn down the call volume		During a call, rotate the function key counterclockwise.	Duh~	/
<p>Note: Every time you rotate the function key by 2 frames, it will be accompanied by "Duh~" to complete the volume adjustment, if you need to adjust the volume more than once, please make the next volume adjustment after the "Duh~" sound.</p>				
On/off auto-answer function	 +  + 	In standby mode, long press [multifunction button + previous button + next button] for about 5 seconds	33 Turn on auto answer 32 Turn off auto answer	/

Note: When the auto answer function is on, the device will automatically answer the call after 15 seconds when an incoming call comes in.




Music Function

(Note:Before using the music function,please make sure that T2Plus has been successfully connected to the Bluetooth of your cell phone.)

Function	Button	Operation	Prompts	Bluetooth indicator light
Music playing		Step 1:Turn on the music player in your phone Step 2:Short press once [multifunction button]	/	/
Music pause		Short press once [multifunction button]	/	/
Turn up the volume		During music playing, rotate the function key clockwise	beep~	/
Turn down the volume		During music playback, rotate the function key counterclockwise	beep~	/
<p>Note:Each short press of the Volume +or Volume -key can only adjust the volume by one level.If you need to adjust the volume more than once in a row,please wait until you hear the "beep"sound before making the next volume adjustment</p>				
Previous song		Short press [previous button] once	/	/
Next song		Short press [next button] once	/	/
Sound effects switching	 + 	Simultaneous short presses [previous button + next button]	1. Bass mode 2. Midrange mode 3. Treble mode	Blue light double flash

Intercom Pairing and Using Methods




1). 2 or more T2Plus MESH networking intercom (MESH networking)

Function	Button	Operation	Prompts	Intercom Indicator Light
Bluetooth intercom for 2 or more T2Plus devices (MESH networking)		Multiple T2Plus Short press the [power button] once	Pairing	Blue light blinks rapidly
		Waiting for connection	2/3/4... intercom connection successful	Blue light always on
Exit Intercom		Short press the [power button] twice	beep~beep~	Blue light always on
Join intercom		Short press the [power button] twice	beep~beep~	Blue light always on

2). 1 T2Plus Bluetooth intercom with other scs products (Bluetooth networking)

1	<p>T2Plus and other scs ETC walkie-talkies, are long press the [multi-function button], enter the pairing state, at this time the voice prompts the pairing mode and the [multi-function button] enters the red and blue light fast flashing state.</p>
2	<p>Short press the [multi-function button] of T2Plus once, the voice prompts for searching, at this time, the [multi-function button] indicator light enters into the red and blue light flashing slowly. All the paired radios will be automatically connected to the network in turn, please wait patiently for all the devices to be connected.</p>
3	<p>When all products have been successfully connected, the intercom indicator will enter a slow flash state, indicating that all devices have been successfully connected, and you can start intercom at this time.</p>

3). 2 or more T2Plus devices networked with 1 or more SCS products for intercom (mixed networking)

Steps	Button	Operation	Prompts	Indicator light
1. First 2 or more T2Plus devices Bluetooth intercom (MESH networking)		Multiple T2Plus Short press the [power button] once	Pairing	Intercom indicator blue light flashes rapidly
		Waiting for connection	2/3/4... intercom connection successful	Intercom indicator blue light is always on
2. Select one T2Plus that has been successfully networked and connect it with other SCS products.		Long press the T2Plus [multi-function button] for about 3 seconds.	Pairing	Bluetooth indicator light blinks red and blue rapidly
	[multi-function button] of other SCS products	Long press the [multi-function button] of other SCS products for 3 seconds.	Pairing	Bluetooth indicator light blinks red and blue rapidly
3. The T2Plus connects to other SCS models via Bluetooth.		Short press T2Plus [multi-function button] 1 time	Searching	Bluetooth indicator light blinks red and blue slowly
4. Wait for all products to connect	All the paired state of the intercom will be automatically connected to the network in turn, please wait patiently for all the equipment to connect, after the connection is successful, so the model model intercom indicator will enter the slow flash state of respiratory.			

Music sharing

Turn on music sharing

With both T2Plus units powered on, you need to send music from one device to the other. For example, specify to share music from Device A to Device B. The steps are as follows:


1. Confirm that A and B retain only each other's pairing information (you can erase all pairing history for both devices).
2. Connect A to your phone's Bluetooth (make sure B is not connected to the same phone as A).
3. Open your phone's music app and put the song on pause.
4. Connect Device A and Device B using MESH pairing (see the steps in the previous section on MESH pairing).
5. Short press the "power button" of Device A twice to pause the intercom call.
6. Long press the "Previous" button of Device A for 2 seconds, then short press the "Multi-function" button of Device A to start music playback and music sharing.
7. Short press the "Power button" of Device A again for 2 times to resume intercom. At this time, you can make intercom call and music sharing at the same time.

Turn off music sharing





During the music sharing process, device A long press [Previous button] for 2 seconds to turn off the music sharing, the blue light flashes slowly; voice prompts "turn off the music sharing", the end of music sharing.

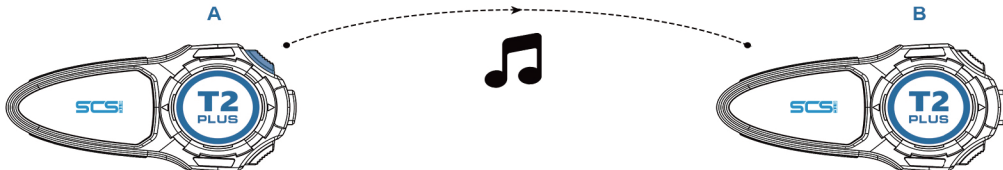Tips:


1. T2Plus if you want to share music with other SCS model products, T2Plus can only serve as a party to be shared, the specific operation steps of the party that takes the initiative to share music can refer to the corresponding model machine music sharing steps.
2. Music sharing, A, B Bluetooth headset, one of the headset to share music, must be connected to the cell phone Bluetooth;
3. A, B headset sharing music, A, B headset need to talk to pairing success;
4. Under the music sharing status, the Bluetooth headset sharing music, short press [multi-function key] to pause/start sharing.



FM

Function	Button	Operation	Prompts	Bluetooth indicator light
FM on / off		In standby mode, press and hold [Next button] for about 3 seconds.	Radio On / Radio Off	
volume +		During FM playback, rotate the function key clockwise	beep~	/
volume -		During FM playback, rotate the function key counterclockwise	beep~	/
Previous FM radio channel		During FM playback, short press the [previous button] once	/	/
Next FM radio channel		During FM playback, short press the [next button] once	/	/

Transparency mode

Enable/disable Transparency mode		Short press the [previous button] 2 times	39 Ambient on 40 Ambient off	Blue light flashing slowly
----------------------------------	---	---	---------------------------------	----------------------------

Product Charging Precautions:

1. Please fully charge the device before using it.
2. Please use the charging head with 5V1A power or less with the charging cable
3. Don't put the product in too high or too low temperature environment, the best use environment is 0 to 40 degrees otherwise it will shorten the product life.
4. Keep away from fire source.
5. Keep away from sharp objects, otherwise the product may be scratched or damaged
6. Do not disassemble the device.
7. When not in use for a long time, please place the device in a dry environment and make sure to charge it once a month to ensure its performance





**More detailed installation and operation videos
can be viewed on the official website.**



SUCCESS ETC TECHNOLOGY CO., LTD

Add:Building 4, An'sheng Road, Shajing Street,
Baoan District, Shenzhen, China

Tel:86-755-23286961 **E-mail:**info@scsetc.com

Web:www.scsetc.com



Designed by SCS in TX USA